

PROCTORPASSIVE YOURIPPA DUO

DOUBLE SIDED EASY TEAR AIR BARRIER TAPE

OVERVIEW

ProctorPassive YouRippa Duo Tape is a double sided tape made with an aggressive, moisture resistant polyacrylate pressure sensitive adhesive with superior ageing resistance.

- Easy to tear without needing a cutter or scissors
- Quick and easy to use
- Black carrier for visibility of tape location
- Less adhesive residue on the installers hands
- Release liner for 2 stage application
- Moisture resistant
- Strong, yet very thin
- Does not use toluene, xylene or plasticizers
- Excellent ageing resistance
- Multiple substrate compatibility
- Air, water and vapour tight
- Manufactured in Japan

APPLICATIONS


YouRippa Duo Tape is ideal for air-tight bonding and sealing of overlaps of air and vapour barriers and vapour permeable membranes. The tape is suitable for bonding of smooth and slightly rough surfaces and can be used to provide a bond to steel or timber framing prior to the immediate mechanical fixing of the membrane.

INSTALLATION

Installation of YouRippa Duo Tape must be in accordance with the installation instructions. As with all pressure sensitive tapes, in order to ensure a strong bond, apply pressure on both sides of the material when applying the tape.

Surfaces being adhered must be dry and free of surfactants, release agents like grease or oil, and dirt or dust. Damp or cold surfaces may prove difficult to adhere to and should be allowed to dry and return to a temperature between +5°C to + 40°C prior to application of tape.

All mechanical load on membranes should be distributed to mechanical fasteners, the tape not being applied under mechanical load. The tape is not suitable for long term UV exposure.

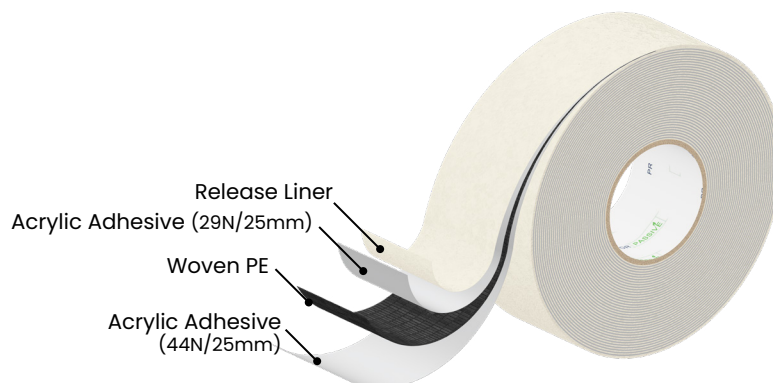

PROCTORPASSIVE YOURIPPA DUO

DOUBLE SIDED EASY TEAR AIR BARRIER TAPE

Properties	Nominal Value
Adhesive Carrier	Easy Tear Woven PE
Adhesive Type	Polyacrylate adhesive
Total Thickness	0.28mm
Release Liner	None
Peel Adhesion	29 N/25mm
	44 N/25mm
Tensile Strength	250 N/25mm
Temperature Range	-10°C to +60°C
Application Range	+5°C to +40°C
UV Exposure	Maximum 2 months
Shelf Life	1 year in original packing stored in a cool and dry location protected from UV
Roll Dimenstions	30mm x 20m
Packaging	32 rolls per carton

All the technical data are average values. We advise the user to test with the material to ensure the suitability for intended application.